

Basics of Control Systems

1. Tachometer feedback in a D.C. position control system enhances stability (T/F).

[GATE 1994: 1 Mark]

Soln. The tachometer feedback is a derivative feedback. Thus it adds zero at origin. Hence stability is improved.

2. The transfer function of a linear system is the

- (a) ratio of the output, $V_0(t)$ and input $V_i(t)$.
- (b) ratio of the derivatives of the output and the input.
- (c) ratio of the Laplace transform of the output and that of the input with all initial conditions zeros.
- (d) none of these

[GATE 1995: 1 Mark]

Soln. The transfer function of a linear system is the ratio of Laplace transform of the output and input with all initial conditions zero

Ans: Option (c)

3. The transfer function of at tachometer is of the form


- (a) Ks
- (b) K/s
- (c) $K/(S+1)$
- (d) $K/S(s+1)$

[GATE 1998: 1 Mark]

Soln. The transfer function of a tachometer is of the form ks , it adds zero at the origin

Ans: Option (a)

4. An electrical system and its signal-flow graph representations as shown in the figure (a) and (b) respectively. The values of G_2 and H respectively, are

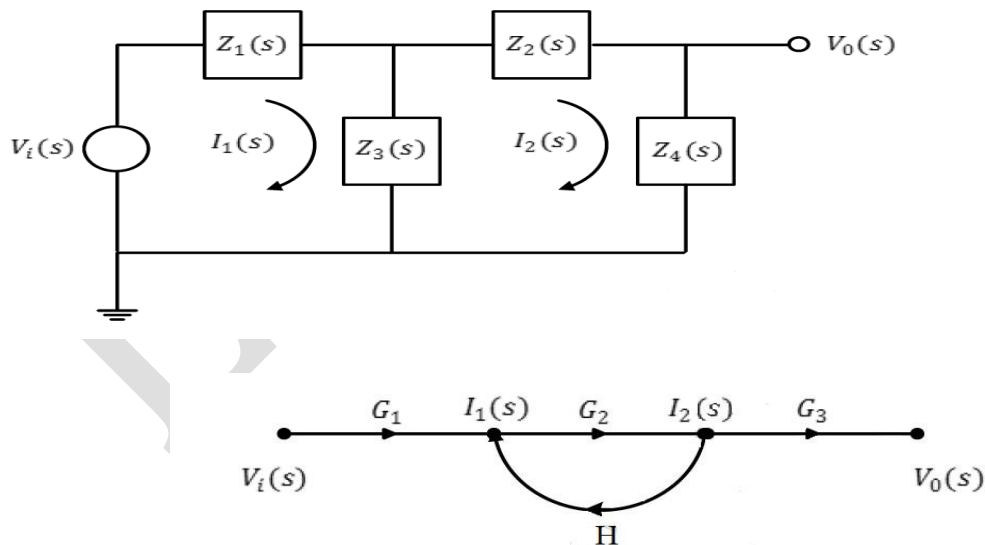

(a) $Z_3(S) / Z_2(S)+Z_3(3)+Z_4(S)$, $-Z_3(S) / Z_1(S)+Z_3(S)$

(b) $-Z_3(S) / Z_2(S)-Z_3(3)+Z_4(S)$, $-Z_3(S) / Z_1(S)+Z_3(S)$

(c) $Z_3(S) / Z_2(S)+Z_3(3)+Z_4(S)$, $Z_3(S) / Z_1(S)+Z_3(S)$

(d) $-Z_3(S) / Z_2(S) - Z_3(3) + Z_4(S)$, $Z_3(S) / Z_1(S) + Z_3(S)$

ECE-SAEC

Basics of Control Systems

[GATE 2001: 2 Marks]

Soln. The values of G_2 and H ?

$$V_1(s) = I_1(s)[Z_1(s) + Z_3(s)] - I_2(s) Z_3(s)$$

$$\frac{V_1(s)}{[Z_1(s) + Z_3(s)]} = I_1(s) - \frac{I_2(s)Z_3(s)}{Z_1(s) + Z_3(s)} \quad \text{----- (I)}$$

In second loop: $[I_2(s) - I_1(s)] Z_3(s) + I_2(s) [Z_2(s) + Z_4(s)] = 0$

or $I_2(s)[Z_2(s)+Z_3(s)+Z_4(s)]=I_1(s) Z_3(s)$

$$G_2(s) = \frac{I_2(s)}{I_1(s)} = \frac{Z_3(s)}{Z_2(s)+Z_3(s)+Z_4(s)} \quad \text{----- (II)}$$

Fro FG $V_1G_1(s)+I_2(s) H(s)=I_1(s)$

$$V_1G_1(s)=I_1(s)-I_2(s) H(s)$$

Comparing with----- (I)

$$G_1(s) = \frac{1}{Z_1(s) + Z_3(s)}, \quad H(s) = \frac{Z_3(s)}{Z_1(s) + Z_3(s)}$$

Ans: Option (c)

5. The open-loop DC gain of a unity negative feedback system with closed-loop transfer function $\frac{s+4}{s^2+7s+13}$ is

- (a) 4/13 (b) 4/9 (c) 4 (d) 13

[GATE 2001: 2 Marks]

Soln.

$$\text{Closed loop transfer function} = \frac{(s)}{1+G(s)H(s)}$$

$$\frac{G(s)}{1+G(s)H(s)} = \frac{s+4}{s^2+7s+13}$$

Basics of Control Systems

$$\frac{1+G(s)H(s)}{G(s)} = \frac{s^2+7s+13}{s+4}$$

$H(s)=1$ for unity feedback

$$\frac{1}{G(s)} = \frac{s^2+7s+13}{s+4} - 1 = \frac{s^2+6s+9}{s+4}$$

$$G(s) = \frac{s+4}{s^2+6s+9}$$

for DC, $s=0$,

$$G(s) = 4/9, \text{ Ans: Option (b)}$$

6. A system described by the following differential equation $\frac{d^2y}{dt^2} + 3\frac{dy}{dt} + 2y = x(t)$ is initially at rest. For input $x(t)=2u(t)$, the output $y(t)$ is

(a) $(1-2e^{-t}+e^{-2t})(t)$

(b) $(1+2e^{-t}-2e^{-2t})(t)$

(c) $(0.5+e^{-t}+1.5e^{-2t})u(t)$

(d) $(0.5+2e^{-t}+2e^{-2t})u(t)$

[GATE 2004: 2 Marks]

Soln. $\frac{d^2y}{dt^2} + 3\frac{dy}{dt} + 2y = (t)$

$$x(t)=2u(t)$$

Taking Laplace Transform

$$s^2y(s)+3s(s)y(s)+2y(s)=\frac{2}{s}$$

$$(s^2+3s+2)y(s)=\frac{2}{s}$$

$$y(s)=\frac{2}{s(s+2)(s+1)}=\frac{A}{s}+\frac{B}{s+2}+\frac{C}{s+1}=\frac{1}{s}+\frac{1}{s+2}-\frac{2}{s+1}$$

$$y(t)=[1+e^{-2t}-2e^{-t}]u(t)$$

Ans: Option (a)

7. In the system shown below, $x(t) = (\sin t)u(t)$. In steady-state, the response $y(t)$ will be

(a) $\frac{1}{\sqrt{2}}\sin(t - \frac{\pi}{4})$

(b) $\frac{1}{\sqrt{2}}\sin(t + \frac{\pi}{4})$


(c) $\frac{1}{\sqrt{2}}e^{-t}\sin t$

(d) $\sin t - \cos t$

[GATE 2006: 1 Mark]

Basics of Control Systems

Soln.



$$x(t) = \sin t u(t), \omega = 1 \text{ rad/sec}$$

$$y(t) = x(t) * h(t)$$

$$y(s) = x(s) H(s)$$

$$H(s) = \frac{1}{s+1}$$

$$H(j\omega) = \frac{1}{j+1} = \frac{1}{\sqrt{2}} \angle -45^\circ \quad \text{as } \omega = 1 \text{ rad/sec}$$

$$y(t) = \frac{1}{\sqrt{2}} \sin(t - \frac{\pi}{4})$$

$$y(t) = \frac{1}{\sqrt{2}} \sin(t - \frac{\pi}{4})$$

Ans: Option (a)

8. The unit-step response of a system starting from rest is given by $c(t) = 1 - e^{-2t}$ for $t \geq 0$. The transfer function of the system is

- (a) $\frac{1}{1+2s}$ (b) $\frac{2}{2+s}$ (c) $\frac{1}{2+s}$ (d) $\frac{2s}{1+2s}$

[GATE 2006: 2 Marks]

Soln. The unit step response of a system starting from rest

$$c(t) = 1 - e^{-2t} \text{ for } t \geq 0$$

$$c(s) = \frac{1}{s} - \frac{1}{s+2}$$

$$c(s) = \frac{1}{s(s+2)}$$

$$\text{Input} \rightarrow \text{unitstep} = \frac{1}{s}$$

$$\text{Input} \times H(s) = c(s)$$

$$\frac{1}{s} H(s) = \frac{1}{s(s+2)}$$

$$H(s) = \frac{1}{s+2} \times s$$

$$H(s) = \frac{s}{2+s}$$

Ans: Option (b)

10. The unit impulse response of a system is $h(t) = e^{-t}, t \geq 0$. For this system, the steady-state value of the output for unit step input is equal to

- (a) -1 (b) 0 (c) 1 (d) ∞

[GATE 2006: 2 Marks]

Soln. The unit impulse response of a system is $h(t) = e^{-t}, t \geq 0$

The steady state value of the output for unit step input

$$H(s) = \frac{1}{s+1}$$

$$X(s) = \frac{1}{s}$$

$$\text{Output } Y(s) = X(s)H(s)$$

$$Y(s) = \frac{1}{s(s+1)}$$

Basics of Control Systems

$$Y(s) = \frac{1}{s} - \frac{1}{s+1}$$

$$y(t) = (1 - e^{-t})$$

When $t \rightarrow \infty$ (steady state), output = 1


Ans: Option (c)

11. A linear, time-invariant, causal continuous time system has a rational transfer function with simple poles at $s = -2$ and $s = -4$, and one simple zero at $s = -1$. A unit step $u(t)$ is applied at the input of the system. At steady state, the output has constant value of 1. The impulse response of this system is

- (a) $[(-2t) + \exp(-4t)] u(t)$
- (b) $[-4 \exp(-2t) + 12 \exp(-4t) - \exp(-t)]u(t)$
- (c) $[-4 \exp(-2t) + 12 \exp(-4t)]u(t)$
- (d) $[-0.5 \exp(-2t) + 1.5 \exp(-4t)]u(t)$

[GATE 2008: 2 Marks]

Soln. Transfer function

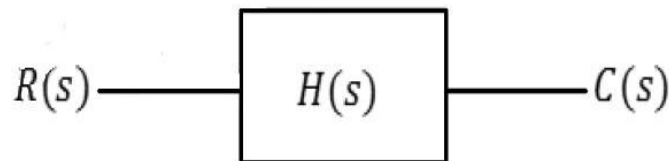

$$H(s) = \frac{K(s+1)}{(s+2)(s+4)}$$

Input $R(s) = \frac{1}{s}$

Output $Y(s) = (s) H(s)$

Final value theorem,

$$\lim_{t \rightarrow \infty} f(t) = \lim_{s \rightarrow 0} sF(s) = 1$$

or $\lim_{s \rightarrow 0} sC(s) = 1, C(s) = \frac{K(s+1)}{(s+2)(s+4)}$

$$\lim_{s \rightarrow 0} \frac{K(s+1)}{(s+2)(s+4)} = 1$$

$$\frac{k}{8} = 1$$

$$k = 8$$

$$H(s) = \frac{8(s+1)}{(s+2)(s+4)} = \frac{-4}{(s+2)} + \frac{12}{(s+4)}$$

$$h(t) = (-4e^{-2t} + 12e^{-4t})ut$$

which is the impulse response of the system

Ans: Option (c)


12. A system with the transfer function $(S) = \frac{s}{s+p}$ has an output $(t) = \cos(2t - \frac{\pi}{3})$ for the input signal $(t) = p \cos(2t - \frac{\pi}{2})$. Then, the system parameter 'p' is

- (a) $\sqrt{3}$
- (b) $\frac{2}{\sqrt{3}}$
- (c) 1
- (d) $\frac{\sqrt{3}}{2}$

[GATE 2010: 1 Mark]

Basics of Control Systems

Soln.

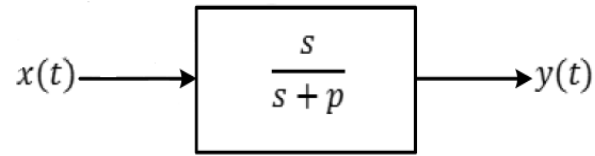

$$\frac{y(s)}{x(s)} = \frac{s}{s+p} = \frac{j\omega}{j\omega+P}, \phi = 90^\circ - \tan^{-1} \frac{\omega}{p}$$

$$y(t) = \cos\left(2t - \frac{\pi}{3}\right), = 2 \text{ rad/sec}$$

$$x(t) = p \cos\left(2t - \frac{\pi}{2}\right)$$

Phase difference between input and output

$$\phi = -\frac{\pi}{3} - \left(-\frac{\pi}{2}\right)$$

$$= \frac{\pi}{2} - \frac{\pi}{3}$$

$$= 90^\circ - 60^\circ = 30^\circ$$

For the transfer function $\phi = 90^\circ - \tan^{-1} \frac{\omega}{p}$

$$30^\circ = 90^\circ - \tan^{-1} \frac{\omega}{p}$$

$$\tan^{-1} \frac{2}{p} = 60^\circ$$

$$\frac{2}{p} = \frac{\sqrt{3}}{1}$$

$$P = \frac{2}{\sqrt{3}}$$

Ans: Option (c)